


INEO INSTALLATION SYSTEM

Installation element with cistern for wallhung WC and for shower toilet

INEOLINK H920115

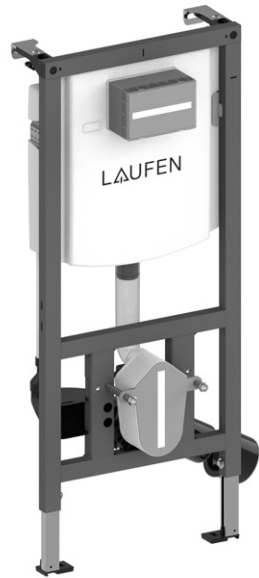

TECHNICAL DATA

Order no.	H920115	Flow pressure range	0.5-10 bar
Certified to	EN 14055, EN 1519	Water temperature	max. 25°C
matching for	Shower toilet ready	Tank	Installation depth: 120 mm, material PP
Specifications	<p>Self-supporting steel frame for covering with plasterboard, installation onto a solid wall, in drywall constructions.</p> <p>Construction height 1120 mm.</p> <p>With connection box for shower toilet and electronic flush plates.</p> <p>With support for WC ceramic with small contact surfaces.</p> <p>With front operated.</p> <p>Cistern with adjustable flush flow regulator according to EN 14055, pre-assembled, Dual-Flush 6/3-l (4.5/3-l, 4/2.6-l-flush), with water condensation insulation.</p> <p>Non-slip leg supports, rotatable foot plates, height-adjustable 0-200 mm.</p> <p>Capable to resist 400 kg</p>	Installation depth	135-205 mm, wall bracket adjustable without tools
Water inlet	top R 1/2, brass, matching for standard pipe systems	Weight	15,0 kg
Outlet	DN 90/110, pipe clamp with depth adjustable	Mounting acc. incl.	Angle valve 1/2", revision box with concealed box and conduit pipe for connection of electronic flush plates, protection box for service opening, fastening material and 2x M12 threaded rods, WC connection set DN 90, HDPE, Drain elbow DN 90, HDPE with adapter DN 90/110, HDPE.
		Mounting acc. excl.	Sound insulation set, order no. VS16032 C00 000 0
		Accessories excl.	Flush plates INEO, dual flush with front actuation
		Mounting information	Please note the necessary wall thickness of 80 mm in case of pre-wall installation.
		Otherwise	Compatible with U-profiles UW 50, UW 75, the Duofix*-System and Silent DN90*. (*are registered third party trademarks)
		Colours	Surface powder coated

TECHNICAL DRAWINGS / S 1 : 20

