
LAUFEN INSTALLATION SYSTEM




CU2 Concealed frame for urinal without integrated control 89266.4

TECHNICAL DATA			
Order no.	89266.4	Water connection	right Rp 1/2", brass
matching for	Urinal ANTERO, order no. 84115.3,	Flow pressure range	1-8 bar
	CAPRINO PLUS, order no. 84206.1,	Installation depth	140-195 mm
	CASA, order no. 84014.1, 84014.5, IL BAGNO	Weight	13,3 kg
	ALESSI ONE, order no. 84097.1, 84097.5	Mounting acc. incl.	Shut-off valve, inlet connection pipe, building
	LEMA, order no. 84019.7, 84119.3		protection with cover, M8 threaded rod and
	VAL order no. 84028.1, 84028.5		fastening material.
	VILA order no. 84114.1, 84114.2	Mounting acc. excl.	Sound insulation set, order no. 89269.6
Specifications	Self-supporting steel frame for drywall and solid	Accessories excl.	Front plate with infrared control, mains version
	building, for surface and flush installation,		with Bluetooth, order no. 37066.0.004.720.1
	pre-assembled with concealed kit LAUFEN		battery version 6V, order no. 37066.0.004.721.1
	SmartControl-U.	Mounting information	Please note the necessary wall thickness of 80 mm
	Connections pre-set to fit LEMA 84019.7		in case of pre-wall installation. System installation
Other specifications	Galvanized leg supports, rotatable,		is also possible between modular walls (plaster-
	height-adjustable 0-200 mm.		board).
	Capable to resist 100 kg	Colours	Surface powder coated blue

TECHNICAL DRAWINGS / S 1 : 20

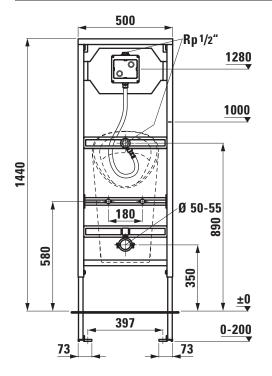

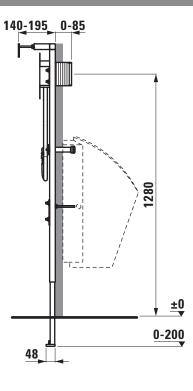

L众UFEN